


LICHT

tulux

SWISS LIGHT CREATIONS

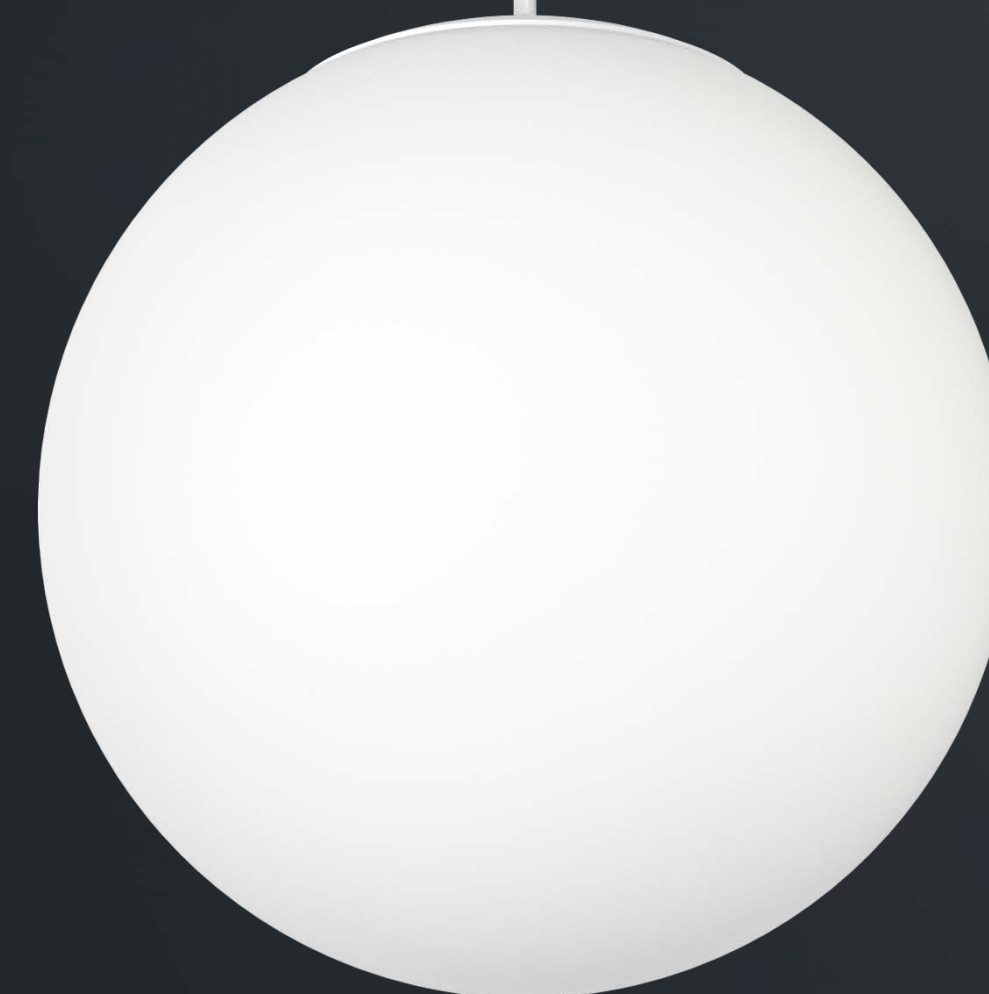

PERL

PERL


OVERVIEW



	Ceiling/wall	Cable pendant	Tube pendant
Light colour			
3000 K / CRI > 90	•	•	•
4000 K / CRI > 90	•	•	•
Light output			
Low	•	•	•
Medium	•	•	•
High (only Ø 400 mm and Ø 500 mm)		•	•
Cover			
Opal matt glass	•	•	•
Opal matt plastic	•	•	•
Unified glare rating			
UGR < 19 – < 22 (only Ø 500 mm tube pendant)			•
UGR < 22	•	•	•
Dimensions			
Ø 200 mm	•		
Ø 250 mm	•	•	•
Ø 300 mm	•	•	•
Ø 400 mm		•	•
Ø 500 mm		• (plastic only)	•
Control			
ON/OFF (only for ceiling/wall Ø 200 mm, Ø 250 mm and Ø 300 mm)	•		
DALI	•	•	•



- Other technical specifications:**
- Effective luminous flux: 1024 to 7337 lm
 - System efficiency: up to 127 lm/W
 - Shock resistance: IK10 (plastic)/IK03 (glass)
 - Photobiological safety: RG0
 - IP class: IP20/ Insect-proof lamp housing



← Scan the QR code and discover all the highlights of the PERL product family!

CUSTOMISATION

We can tailor your individual solution to suit your needs:

- Dimensions
- Housing colour
- Materials
- Cover material
- Light output
- Colour temperature
- IP class
- Surface-mounted cable routing

PERL – five convincing reasons.

1. Perfect globe shape
2. Floating elegance
3. Flawless workmanship
4. Uniform appearance
5. Variety of inspiring designs









Photo © Kuster Frey





TULUX AG
TÖDISTRASSE 4
CH-8856 TUGGEN
T +41 55 465 60 00
F +41 55 465 60 01
INFO@TULUX.CH

WWW.TULUX.CH



SLG 
member